





## PRODUCT FEATURES

- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal clear cubes that melt slowly.
- Durable stainless steel exterior.
- Slide in air filter at front for easy cleaning - maintaining performance efficiency.
- Double-sided stainless steel evaporator for all water conditions - produces more ice in less cycles.
- Flush mount to rear wall.
- Good in hard water areas.
- Snap in water tank design - easy to remove for sanitization.
- Low electrical consumption.
- Low water consumption.
- LED lights and audible alarms.
- 3 year parts and labour warranty on entire unit.

## CUBE SIZE:



## TECHNICAL DRAWING

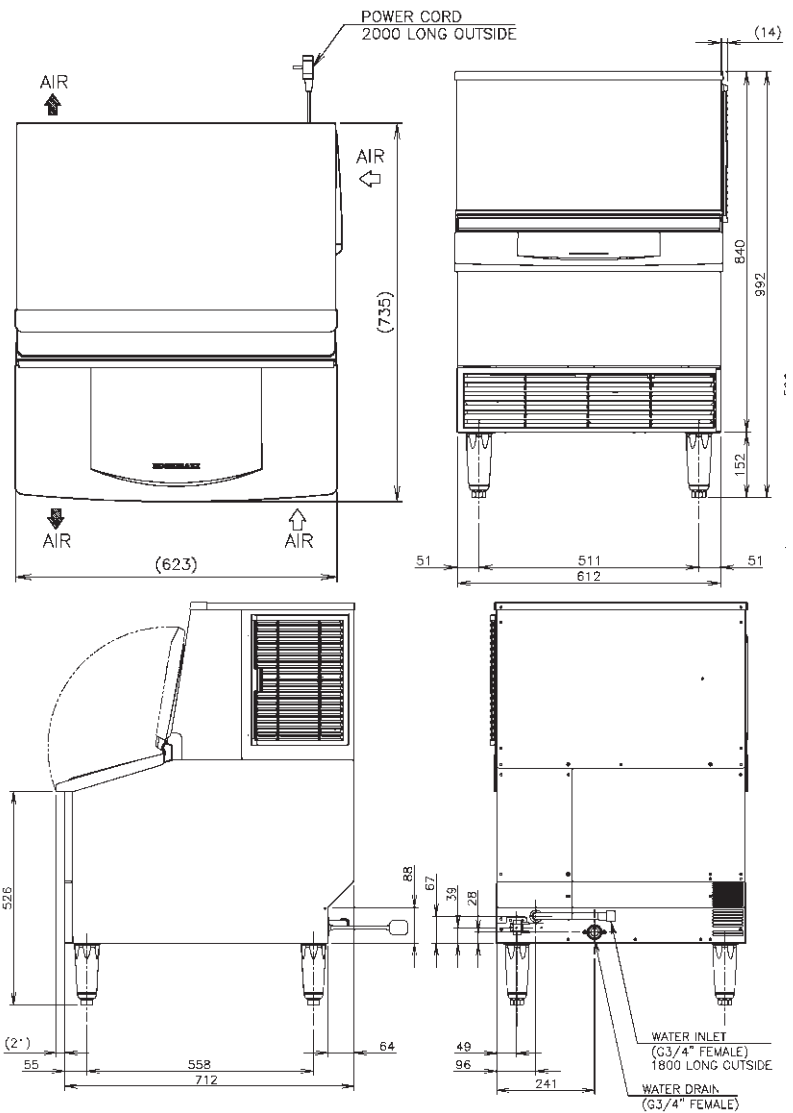

## PRODUCT SPECIFICATION

<b>Production Capacity per 24hours</b>	Approx. 112kg @10°C Air temp; 10°C Water Approx. 105kg @ 21°C Air temp; 15°C Water Approx. 73kg @ 32°C Air temp; 21°C Water
<b>Max Storage Capacity</b>	Approx.. 45kg
<b>Freeze Cycle Time</b>	Approx.. 21 Min
<b>Ice Production Per cycle</b>	Approx. 1.67kg/182pcs
<b>Dimensions</b>	612mm (W) x 712mm (D) x 992mm (H)
<b>Cooling</b>	Air
<b>Weight Net/Gross (kg)</b>	62 / 82
<b>AC Supply Voltage</b>	1 PHASE 220-240V 50Hz
<b>Amperage</b>	Running: 4.1A Starting: 18.3A
<b>Refrigerant Charge</b>	R404A / 260g
<b>Operating Conditions</b>	Ambient Temp.: 1- 40°C Water Supply Temp.: 5- 35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: ± 6%



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2019 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: May 2019